


## Technical Data Sheet 5070

High tack Modified acrylic transfer adhesive. Used for lamination of rubber, foam, polyethylene, polyether and similar surfaces, especially PUR foam, in gaskets and sealing applications.

### Construction

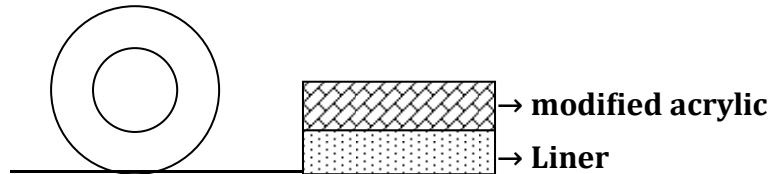

**Adhesive:** modified acrylic (solvent based) transfer adhesive.

**Liner:** 80 g/m<sup>2</sup> Havana Siliconized paper.

High tacky adhesive system that provides quick bonding result.

### Properties

**Adhesive Thickness:** 0.7mm ± 7%

**Adhesive strength: AFERA 5001** 27 N/25mm ± 3%

**Temperature Resistance:** -30°C - 100°C

**STORAGE:** Store at stored in original boxes at a temperature of 21°C and a relative humidity of 50%

**SHELF LIFE:** 12 Month from delivery under storage conditions

### General Notes:

The quality and durability of the tape may vary according to temperature and humidity. Low temperatures can increase the risk of condensation, consequently reducing the tack of the self-adhesive product

The information contained herein are given in good faith based on our current knowledge and experience on the product when properly stored, handled and applied under normal conditions in accordance with our recommendations. In practice the differences in materials, substrates and actual site conditions are such that no warranty in respect to merchantability or fitness for a particular purpose, nor any liability arising out of any legal relationship whatsoever, can be inferred from this data sheet. The recommendations or suggestions contained in this data sheet are made without guarantee as to results. We suggest that you test the product's suitability for the intended application and purpose prior to use. Our responsibility for claims arising from breach of warranty, negligence or otherwise is limited to the purchase price of the material.

Version SL20110315

